


TEM₀₀ beam profile, short pulse duration, Q-switched solid-state laser
Wavelengths 1064 nm, 532 nm and 355 nm

General Description

The IMPACT-series are high repetition rate solid-state diode pumped Q-switched lasers with the fundamental wavelength 1064 nm. To achieve both short pulse duration and high output power an oscillator-amplifier configuration is used. This allows also efficient and reliable frequency conversion into the green and UV with a TEM₀₀-mode beam structure. All lasers deliver < 10 ns short pulses with a superior beam quality of $M^2 < 1.2$. Due to their high pulse-to-pulse stability of $\sigma < 2\%$ and their sealed housing they are well suited for industrial use. The high repetition rate provides a high throughput. The laser head works without heat sink and cooling air. The laser system is completely computer controlled via a RS-232 interface. Different trigger control modes are available.

The system operates autoranging from 90-240 VAC, 50-60 Hz.

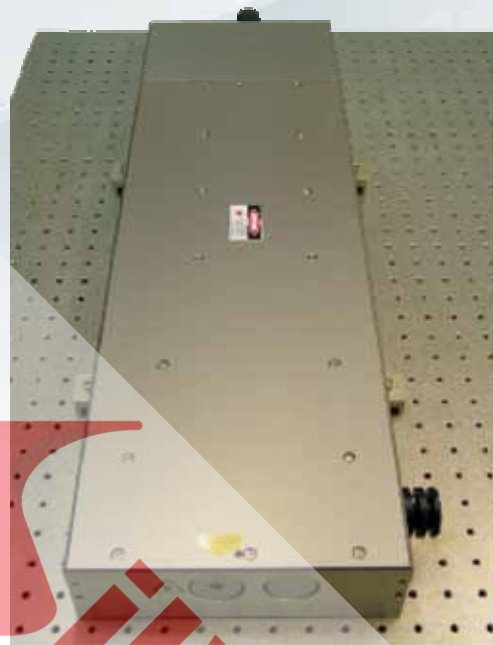

Unique Option „3C“

Wavelengths 1064, 532 and 355 nm
usable with optimum beam quality out
of one laser system.

Applications

- Rapid prototyping
- Wavelength sensitive processes
- Stereo-lithography
- Display repair
- Micro-machining
- Solar cell structuring
- Job-Shop

Product Specifications

	IMPACT-3C		
Model	IMPACT-Q	IMPACT-S	IMPACT-T
wavelength	1064 nm	532 nm	355 nm
average power	12.0 W	6.0 W	3.0 W
pulse duration	<10 ns	< 10 ns	< 8 ns
energy per pulse	900 µJ	500 µJ	300 µJ
repetition rate	0-200 kHz	0-50 kHz	0-50 kHz
M ²	< 1.2	< 1.2	< 1.3

All data at 15 kHz pulse repetition rate
Specifications are subject to change without notice due to product improvement.


System Dimensions (L x W x H), weight

Laser head	735 x 225 x 72 mm ³	15.0 kg
Power supplies	446 x 440 x 134 mm ³	16.8 kg
Chiller	446 x 440 x 134 mm ³	18.5 kg



Electrical Characteristics

Operating voltage	85-264 VAC
Frequency	47 – 63 Hz
Power consumption	450 W typ.

Typical Performance

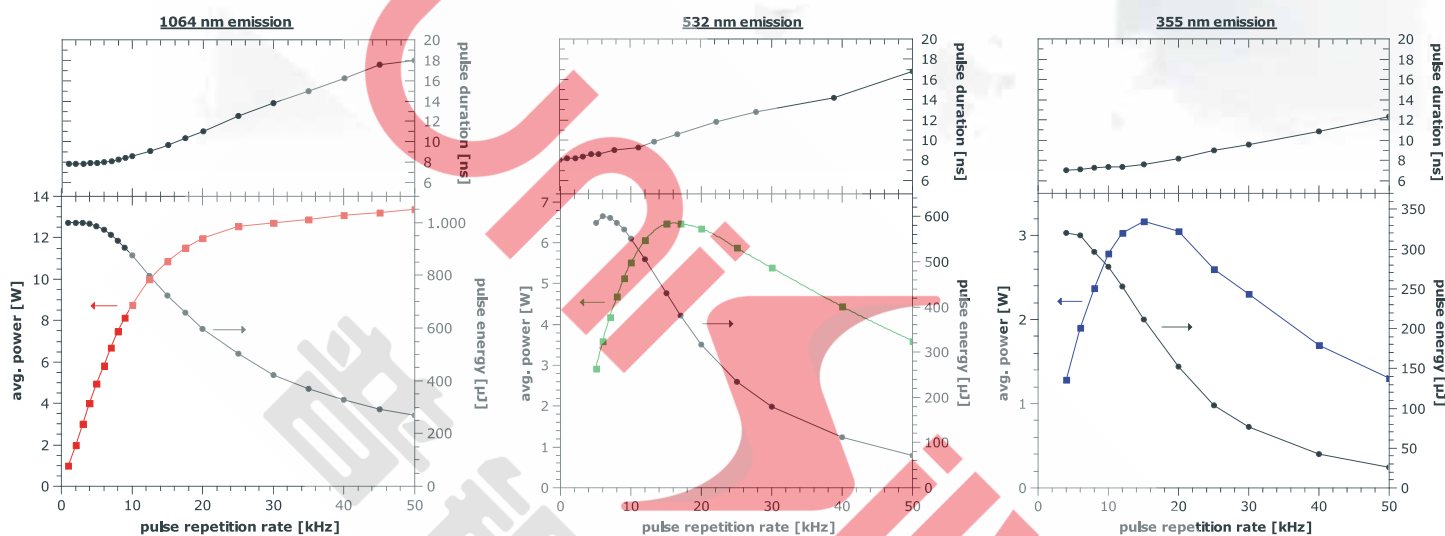

Dimensions Laser Head

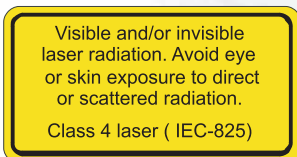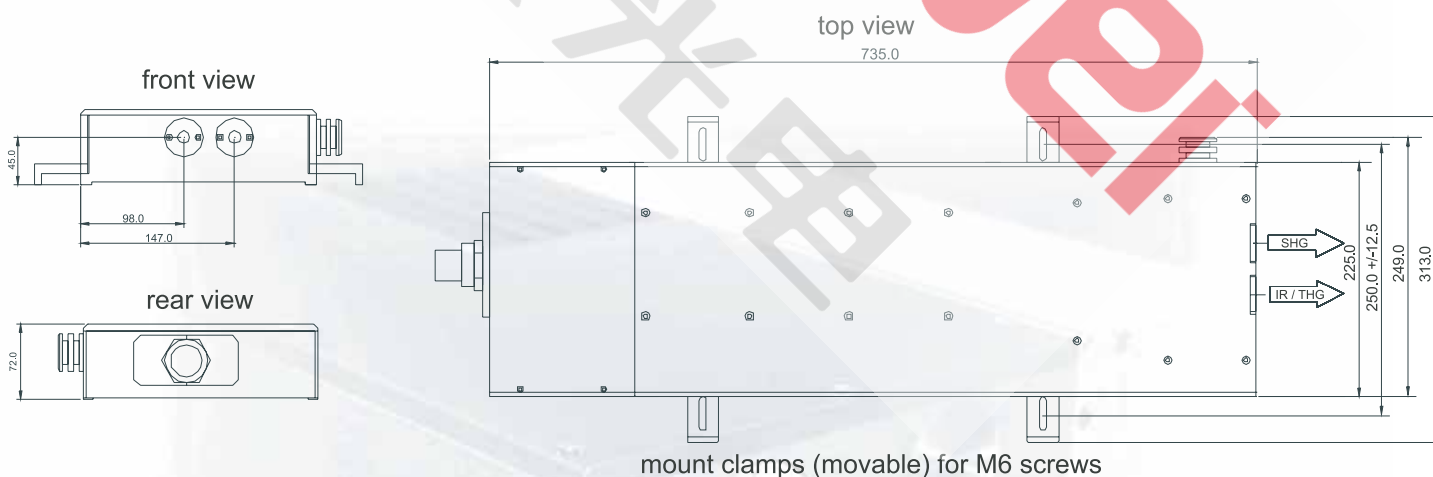

Xiton Photonics GmbH
Kohlenhofstrasse 10
D-67663 Kaiserslautern
Germany

Tel.: +49 (0)631 414 9944-0
Fax: +49 (0)631 414 9944-9
sales@xiton-photonics.com
www.xiton-photonics.com